

4-EVF-170




General Features

- > High Corrosion Resistant Performance: Pb-Ca multi-alloy grid
- > High Energy Density and Power Density
- > Excellent Charge Acceptance Ability
- > Strong High and Low Temperature Performance
- > Optimized Capability of instant High-current Discharging
- > Low self-discharge rate



Dimension: 260(L)×180(W)×280(H)×280(TH) Unit: mm

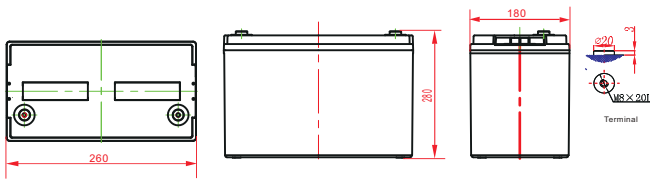

Applications

- > Electric vehicle
- > Electric wheelchair
- > Electric scooter
- > Electric play car for children
- > Garbage truck
- > Patrol car

Specification

Nominal Voltage	8V
Nominal Capacity	170Ah
Design life	5 years
Terminal	M8
Approx. Weight	Approx36.0kg (79.5lbs)
Container Material	ABS
Rated Capacity	196Ah 10Hour Rate (196A to 7V) 170Ah 3Hour Rate (56.7A to 7V) 138Ah 1Hour Rate (138A to 7V)
Operating Temperature	Discharge: -20 ~50℃(-4~ 122°F) Charge: -20 ~50℃(-4~ 122°F) Storage: -20 ~50℃(-4~ 122°F)
Charge Method (25 °C)	Float Use:9.13-9.27V@25℃ Cycle Use :9.80-9.93V,@25℃ Max charge current 34.0A
Self discharge	3% of capacity declined per month at 25℃

Constant Current Discharge Characteristics Unit: A (25 °C, 77°F)


F.V/Time	5Min	15Min	30Min	1h	2h	3h	5h	8h	10h	20h
1.60V	723	389	237	142	79.2	58.7	38.6	24.7	20.3	10.7
1.65V	702	376	232	141	78.9	58.1	38.2	24.6	20.2	10.6
1.70V	673	368	228	139	78.2	57.3	37.9	24.4	19.9	10.6
1.75V	619	357	227	138	77.1	56.7	37.4	24.1	19.7	10.5
1.80V	555	332	216	135	75.6	56.3	36.4	23.9	19.6	10.5
1.85V	495	297	197	125	71.9	53.0	34.6	23.0	18.9	10.3

Constant Power Discharge Characteristics Unit: W/cell(25 °C, 77°F)


F.V/Time	5Min	15Min	30Min	1h	2h	3h	5h	8h	10h	20h
1.60V	1213	685	427	269	150	112	73.2	48.1	39.1	21.1
1.65V	1166	672	424	266	150	110	72.9	47.7	38.8	21.0
1.70V	1161	664	424	264	148	110	72.2	47.5	38.3	21.0
1.75V	1082	661	422	262	148	109	71.9	47.1	38.0	20.9
1.80V	994	624	411	260	147	109	71.1	46.7	37.5	20.7
1.85V	887	558	377	241	141	103	67.8	45.1	36.9	20.5

4-EVF-170


Discharge characteristic

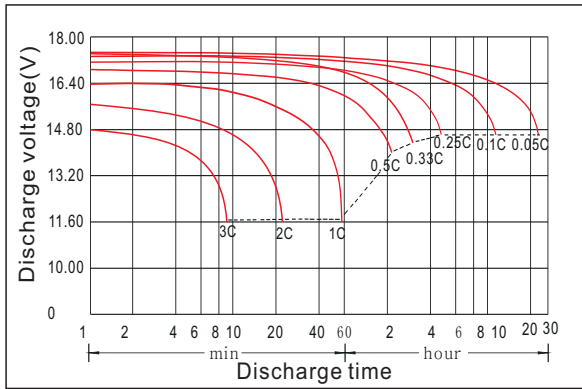


Charging characteristic

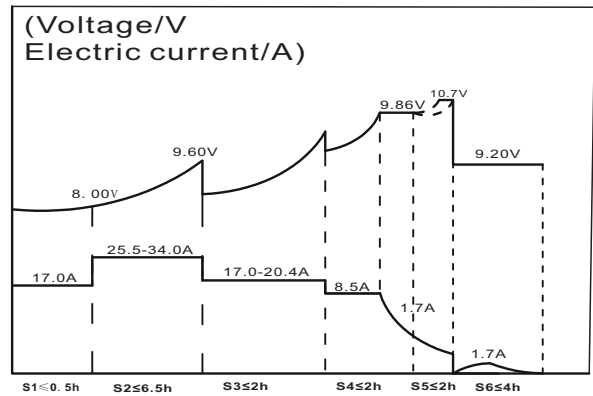


The effect of temperature on capacity

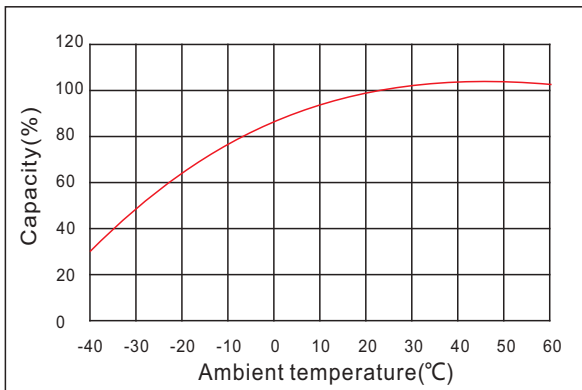


The effect of discharge depth on cycle life

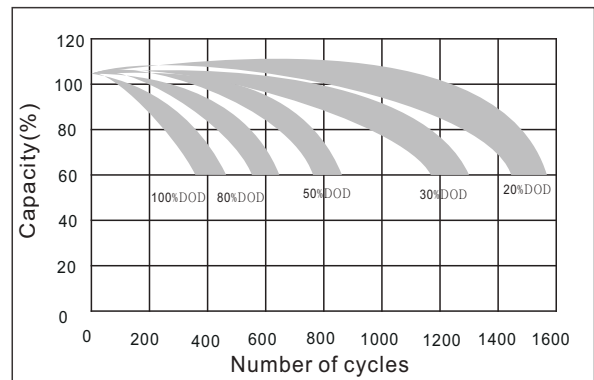

Curves of self-discharge

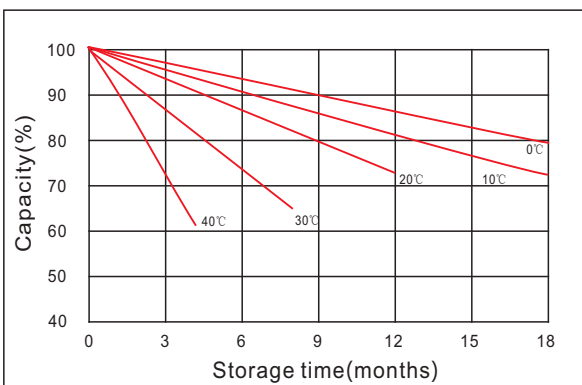

Curves of open circuit voltage vs. capacity

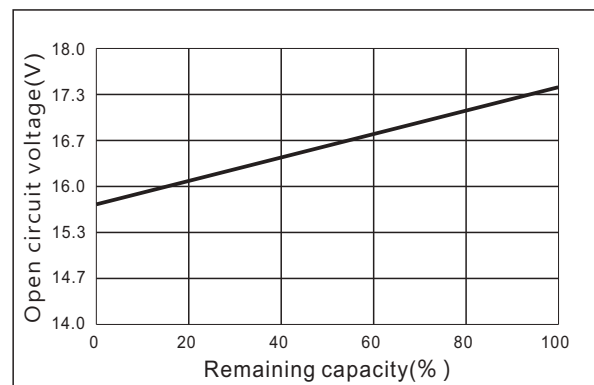

www.kiju.com.cn info@kiju.com.cn

+86-791-85982779 +86-791-85989842

Jiangxi Jingjiu Power Science&Technology Co. Ltd.
Add: 1388 Fushan No.1 Street, Xiaolan Economic Development Zone, Nanchang City, Jiangxi Province, China.

Jiangxi Jingjiu Power (Jiujiang) Co. Ltd.
Add: Xiwang Rd, Aicheng Industrial Park, Yongxiu Country, Jiujiang City, Jiangxi Province, China.

